


General overview:
Human External Cargo (HEC), complex Personnel Carrying Device System (cPCDS)
named "HEC_5_H125", for Airbus AS350/H125, all series

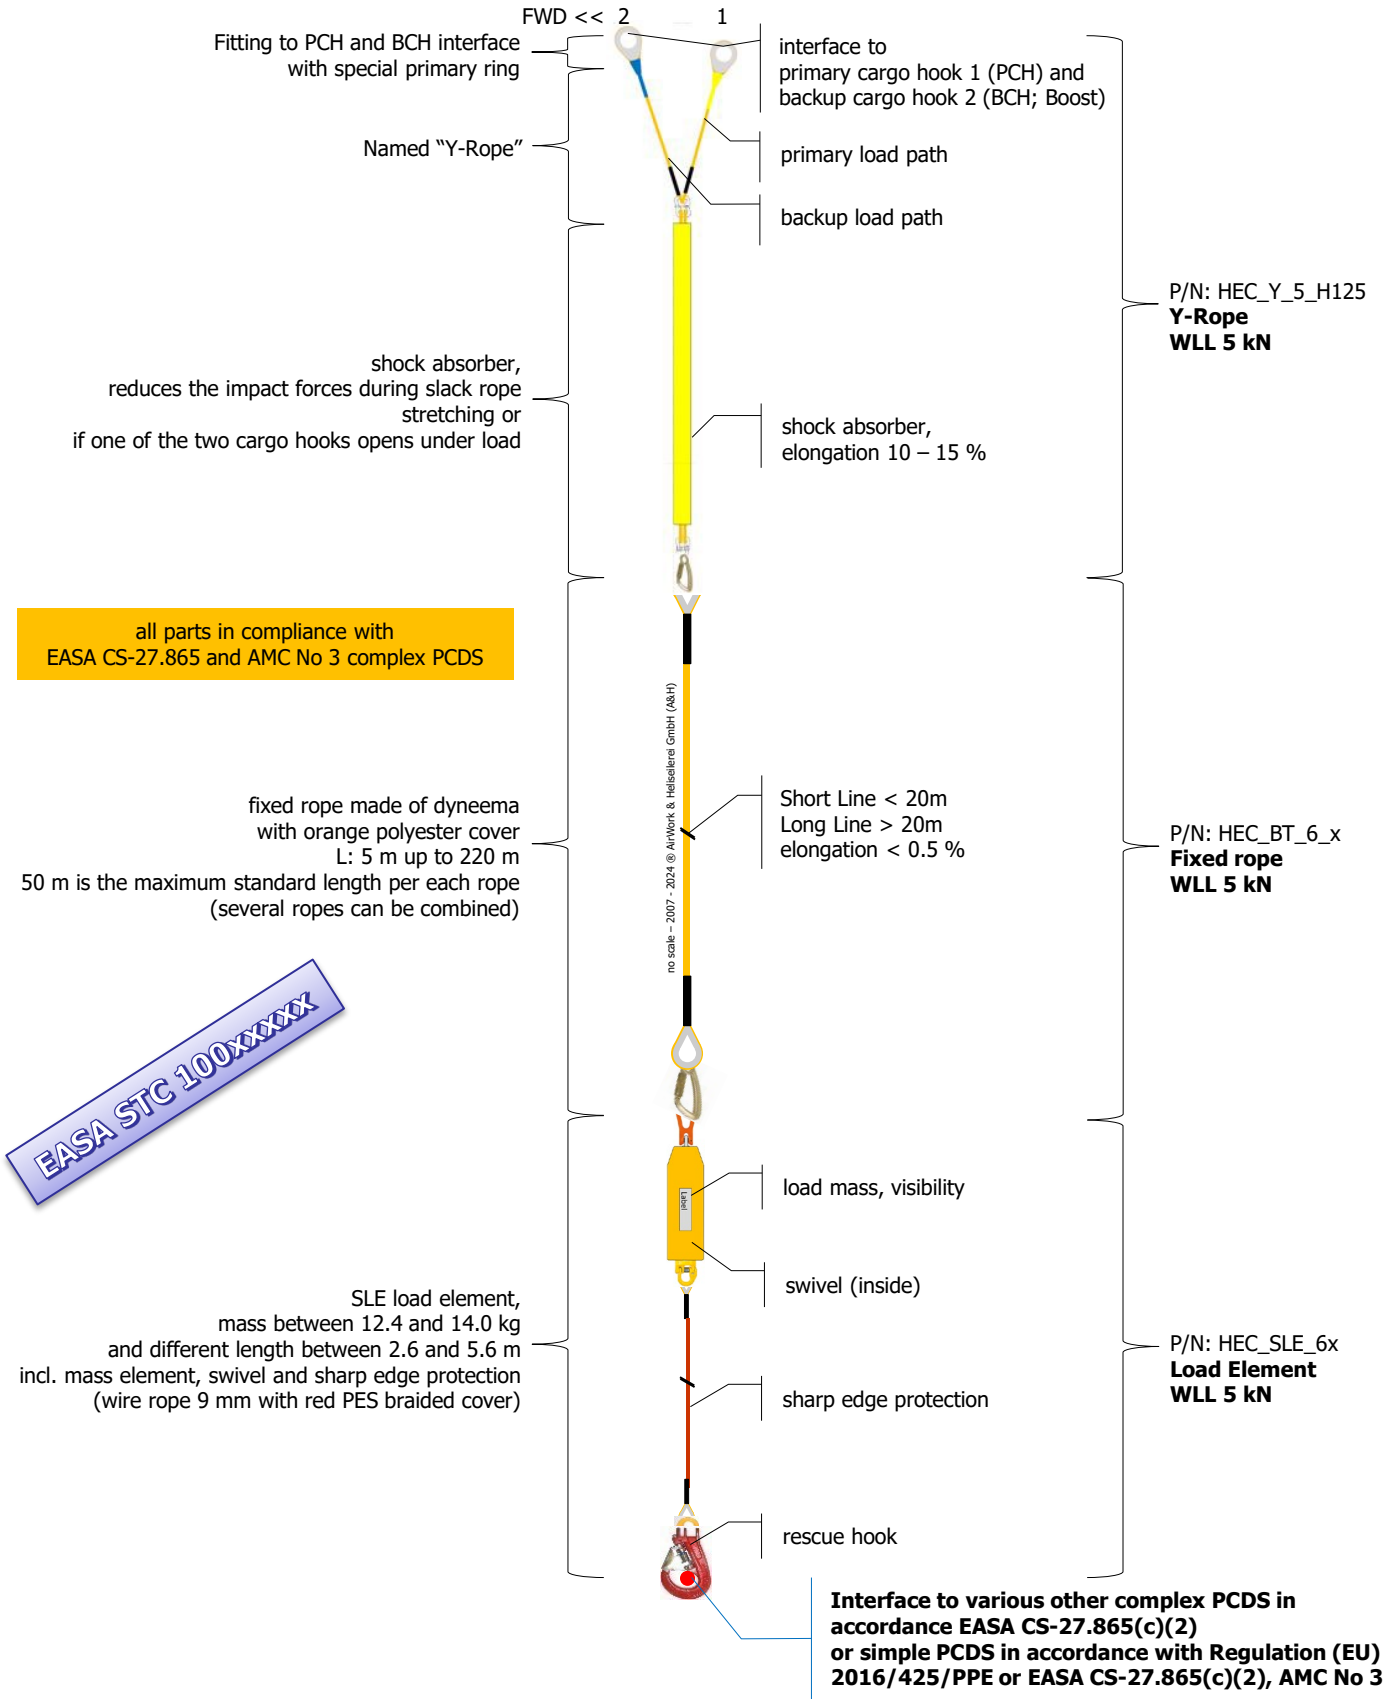

all parts in compliance with EASA CS-27.865 and AMC No 3 complex PCDS

fixed rope made of dyneema with orange polyester cover
 L: 5 m up to 220 m
 50 m is the maximum standard length per each rope (several ropes can be combined)

EASA STC 100XXXXXX

SLE load element, mass between 12.4 and 14.0 kg and different length between 2.6 and 5.6 m incl. mass element, swivel and sharp edge protection (wire rope 9 mm with red PES braided cover)


Offer items and details (part number, length, masses)

Helicopter model: _____, S/N: _____ (if applicable), Customer (KZK): _____, AD: _____

Interface Dual Hook-System Boost HEC Systems «B1310-DHS»
EASA STC 10081304

EASA STC 100xxxxxx

offer item _____

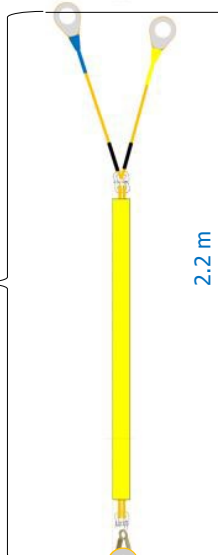

2.2 m


P/N: HEC_Y_5_H125

➤ 2.2 m is the standard length

Please make an offer for _____ pc/s HEC_Y_6_H125

please note: this part can not be changed (length, color, size).

offer item _____

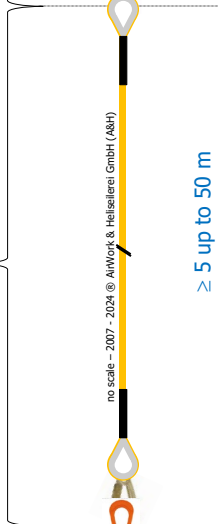

≥ 5 up to 50 m

P/N: HEC_BT_6_x (6 = Sitze; 5 = WLL in kN; x = length in m). The colour is always orange


Please make an offer for

- Any individual rope length from 5 m to 50 possible;
- max 4 ropes of 50 m can be combined (total 200 m)
- Indicate below the desired numbers of ropes and the individual lengths:

_____ _____ _____
 _____ _____ _____

please note: this part can vary in length between min. 5 m and max.50 m

offer item _____

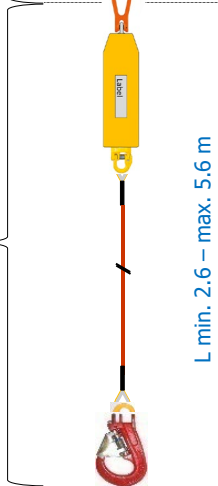

L min. 2.6 – max. 5.6 m

P/N: HEC_SLE_6x_x (6x = size, _x = length in m, WLL = 5 kN).

Please make an offer for

| All options: | size | length m ^{+/- 100mm} | mass kg ^{+/- 0.1 kg} | select |
|--------------|-------|-------------------------------|-------------------------------|--------------------------|
| HEC_SLE_6l_2 | large | 2.6 | 12.4 | <input type="checkbox"/> |
| HEC_SLE_6l_3 | " | 3.6 | 13.0 | <input type="checkbox"/> |
| HEC_SLE_6l_4 | " | 4.6 | 13.5 | <input type="checkbox"/> |
| HEC_SLE_6l_5 | " | 5.6 | 14.0 | <input type="checkbox"/> |

Please note: this item may vary in length and weight, but not in the choice of fittings.
the minimum weight of the SLE must be 11.4 kg (25 lbs) according to Boost STC 10081304

Lengths

- shortest possible length: 2.2 m (Y) + 2.6 m (SLE) = 4.8 m
- Standard length: 2.2 m (Y) + 50 m (BT) + 5.6 m (SLE) = 57.8 m
- Maximum length: 2.2 m (Y) + 4 x 50 m (BT) + 5.6 m (SLE) = 207.8 m

Offer item _____ options; simple PCDS

Approved up to 220 m

The flying lines from A&H Equipment - feel experience and safety.